

Key Features

- Compatible use with fuels, oils and coolants
- Multiple and custom mounting arrangements
- Side or top exit cable options
- Lightweight Aluminium design
- Operating temperature range: -40°C to +125°C
- Custom lengths available: 100 – 750mm
- Temperature output option (coming soon)

The GSLevel 4223 is a lightweight capacitive liquid level sensor designed to provide accurate and reliable liquid level measurement to variety of applications.

The sensor is a form fit and function replacement for the R-Series sensors as well as bringing the flexibility to be adapted to an almost limitless range of mechanical mounting configurations. Standard stock adaptors are available for 1, 2, 3 & 5 bolt mounting as well as metric male thread designs.

For real product flexibility, you have the ability to design your own custom configurations to suit any flat gasket seal configuration, limitless thread adaptations to both Male and Female threads.



OUTPUT SPECIFICATION

Primary output standard range	0.25 – 4.75V Range is Datum A to Datum B (see drawing on page 2)
Primary output maximum range	0.25 – 10V (configurable through user software. See page 4)
Primary output accuracy	±1% @ 50% FSD (full scale deflection) 20°C
Primary volumetric output	Configurable through user software. See page 4 Tank profiling Wizard or CSV file upload
Secondary output (option N)	Open collector output 50V / 1a max switch to ground (V-)
Secondary output hysteresis (option N)	Configurable through user software. See page 4

ELECTRICAL

Supply voltage	5-32VDC
Supply current	<20mA
Interface	Compatible with RS232
Resolution	10 bit (1024 points over measurement range)
Sample rate	100Hz

MECHANICAL

Lengths available	100-750mm
Mounting options	1 hole, 2 hole, 3 hole, 5 hole and M22x1.5 Threaded
Sealing options	Panel gasket or o-ring
Cable exit options	Top or Side
Weight (100mm)	36.5g (100mm probe with 1000mm cable) +0.34g per mm (probe) thereafter

ENVIRONMENTAL TESTING AND CERTIFICATION

Ingress Protection	IP68
Shock tested to	BS EN 60068-2-27 (half-sine pulse 25g, 6ms 1000 shocks (positive and negative) in each 3 axis)
Vibration tested to	Resonant frequency search 5 to 2500Hz @ 0.5g peak
Pressure	10 bar (absolute and differential)
Drop	1m (in packaging) on all 3 sides
Thermal shock	to BS EN 60068-2-14, test Na
Dry heat	to BS EN 60068-2-2, test Bb
Cold	to BS EN 60068-2-1, test Ab
Damp Heat	to BS EN 60068-2-30, test Db
EMC Immunity level	BS EN 60945, BS EN 61326 and BS EN 61000-6-1/2/3/4


WIRING

Cable	Flying lead, 1000mm
Number of cores	6 with drain wire
Wire size	26AWG 7/0.15
Sleeving	XLPE


COMPATIBLE MEDIUM

Fuels	Diesel, Gasoline, Biofuels
Oils	Hydraulic, Gear, Motor, Vegetable, Synthetic ester, Polyalphaolefin, Polyglycol
Coolants	Ethylene Glycol, water
Other	Salt water

PART NUMBER CONFIGURATOR

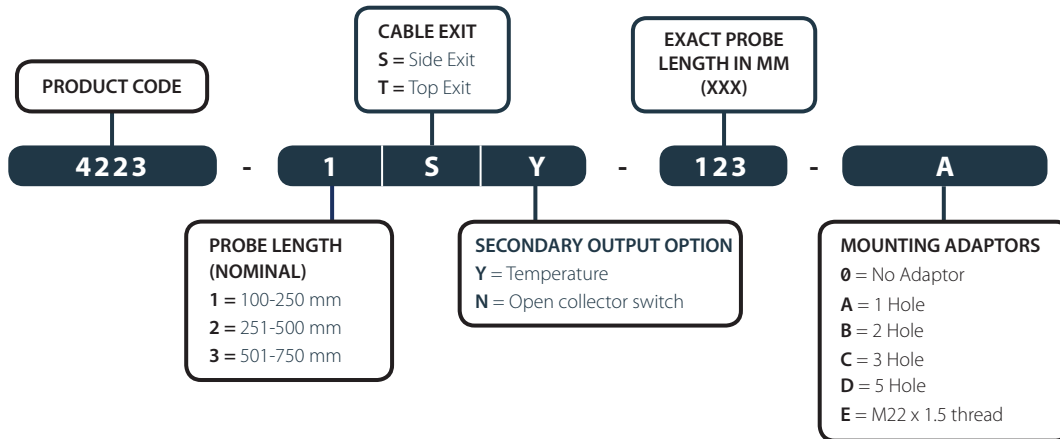


CABLE EXIT OPTIONS

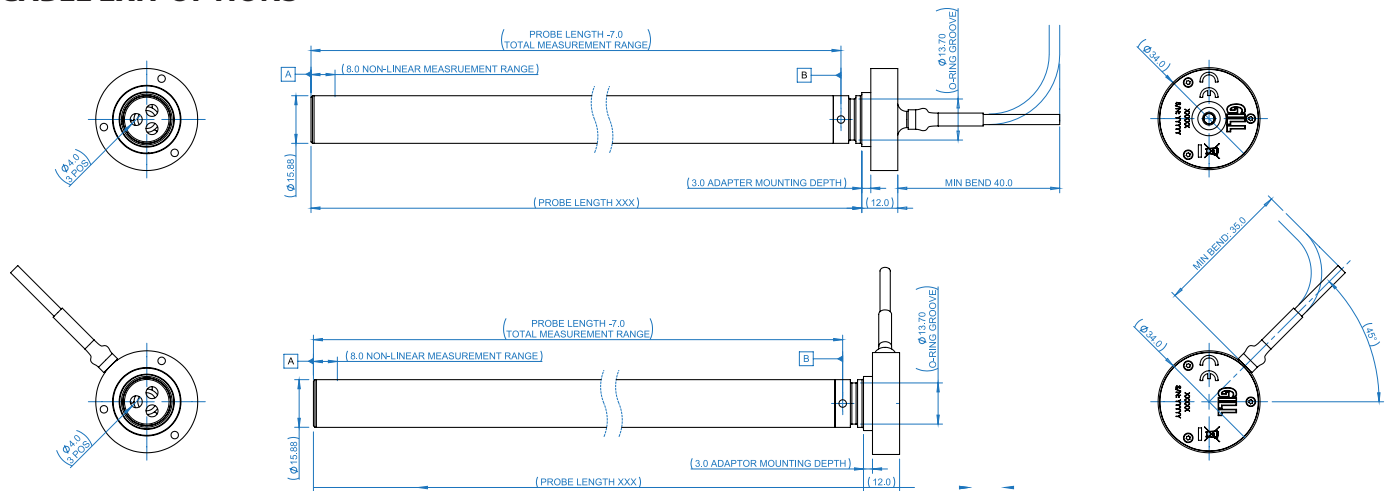

CUSTOM ADAPTOR DESIGN INFO

TOLERANCES

LINEAR	1 Decimal place $\pm 0.1\text{mm}$ 2 Decimal places $\pm 0.05\text{mm}$
ANGULAR	$\pm 1^\circ$

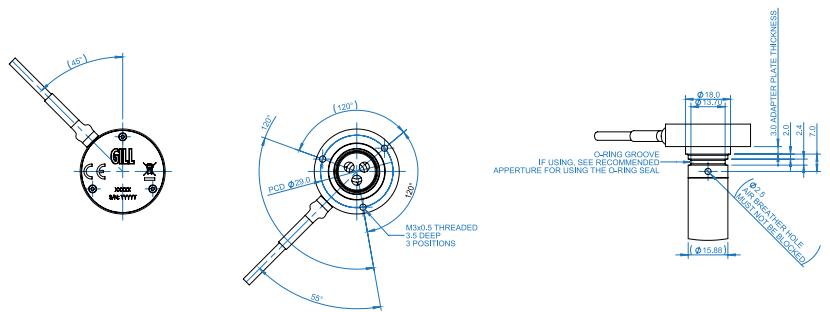

CABLE LOOM

	WIRE COLOUR	DESIGNATION
	RED	+V
	BLACK	-V (GROUND)
	ORANGE	PRIMARY OUTPUT
	BLUE	SECONDARY OUTPUT
	GREEN	Rx
	WHITE	Tx

MOUNTING ADAPTORS

Design Notes – Adaptors & Fitting

Each adaptor is supplied in a kit which includes 3 x M3 CSK screws, with pre-applied adhesive, Fluorosilicone O-rings and a Fluorosilicone Gasket (options A through D only).


Notes – Adaptors can be fitted in 3 orientations (+/- 120° from top dead centre of TOP VIEW below)

Top Exit cable can be selected for use with options A through D



(Side exit cable shown for illustration only purposes)

ADAPTOR	TOP VIEW	SIDE VIEW		
A (1 HOLE)				
B (2 HOLE)				<p>RECOMMENDED MOUNTING APERTURE FOR USING THE O-RING SEAL. USE WITH 1 HOLE FLANGE ADAPTOR. CAN BE USED WITH 2/3/5 HOLE ADAPTORS.</p>
C (3 HOLE)				<p>SENSOR MOUNTED THIS SIDE. BREAK SHARP EDGE 0.2 MAX. Ø16.20. 3.2 MIN.</p>
D (5 HOLE)				<p>PANEL GASKET THICKNESS 2.0</p>
E (THREADED)				

CONFIGURATION USER INTERFACE

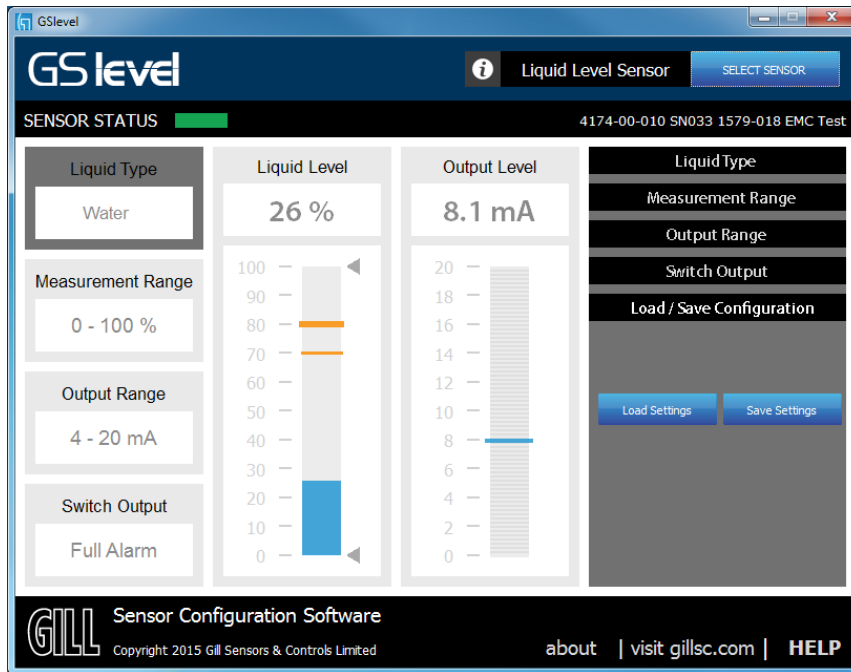

TANK PROFILING WIZARD

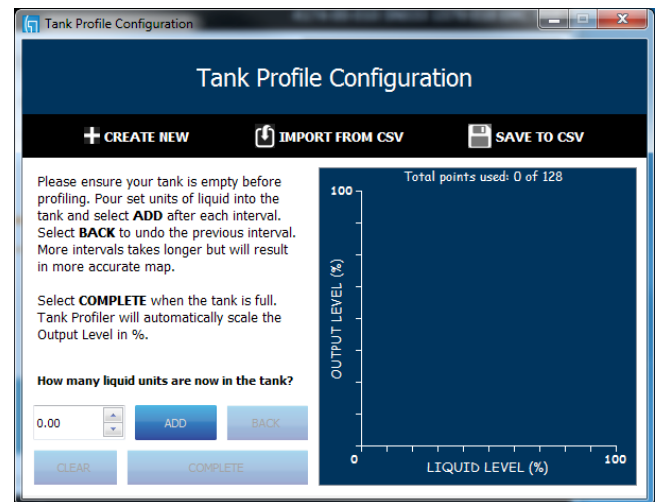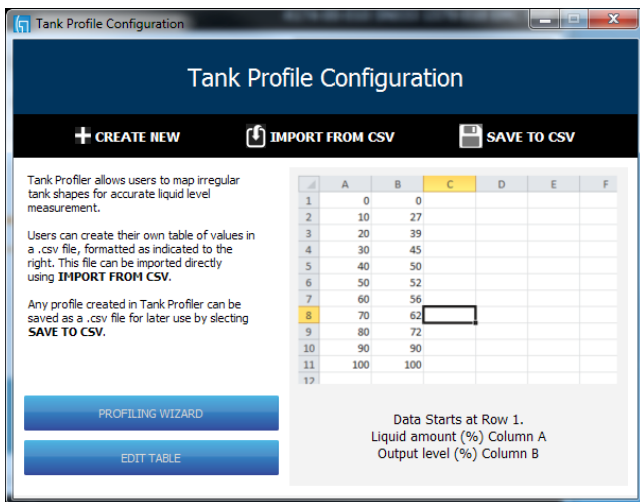

DOWNLOAD



Gill Sensors & Controls Limited

Unit 600 Ampress Park
Lymington, Hampshire SO41 8LW
United Kingdom

Tel: +44 (0) 1590 613 900
Fax: +44 (0) 1590 613 901
info@gillsc.com



www.gillsc.com

LD4223-01 - Iss 1

Copyright © Gill Sensors & Controls 2015

Gill Research & Development Limited, Reg No. 3154453
Registered Office: The George Business Centre, Christchurch Road, New Milton, BH25 6QJ